


MIN 3/4" OF ENGAGEMENT  
 OF THE TORQUE ARM HEX INTO  
 THE BUSHING FOR ALL INSTALLATIONS.  
 PLEASE CONTACT TECH SUPPORT @  
 574-522-5000 OR CHECK WITH ANY  
 QUESTIONS. [www.anmsystems.com](http://www.anmsystems.com)

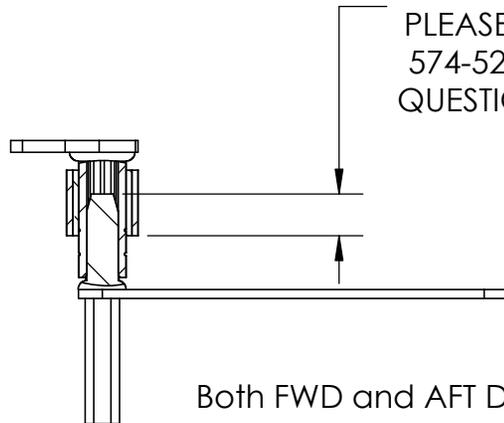

Both FWD and AFT Doors are similar

NEXT ASSY.:  
 SUPERSEDES:  
 DO NOT SCALE DRAWING

REV.	BY	DATE	DESCRIPTION



TITLE  
 DOC00139, Torque Arm and Bushing Assembly

MAT'L SPEC.

*THIS DRAWING IS THE PROPERTY OF A&M SYSTEMS, INC.  
 AND IS NOT TO BE DUPLICATED OR USED IN ANY WAY  
 DETRIMENTAL TO THEIR BEST INTEREST.*

TOLERANCE UNLESS SPECIFIED		DRAWING INFORMATION	
Fractions:	+/- 1/32	DRAWN:	bmiller
Decimals:	.000 +/- .005	DATE:	7/10/2017
Angles:	+/- 1 Deg.	SCALE:	1:4
		CKD:	
		SIZE:	A
		WT.:	

PART NUMBER

PAGE